


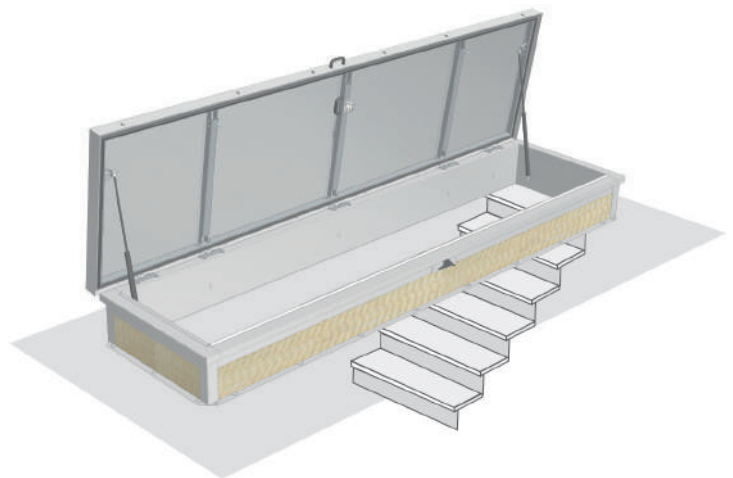

roof access hatches

mcr
PROROOF**mcr PROROOF LD****mcr PROROOF LD**

mcr PROROOF LD and **ST** hatches were designed to allow easy and safe roof access. Additionally the **ST** type provides convenient movement of large-scale packages up and down from the roof. Both **mcr PROROOF LD** and **mcr PROROOF ST** hatches can provide light inside the building thank to the optional translucent glazing.

EPDM GASKET

water tightness guaranteed by special EPDM gasket

TRANSLUCENT OR SOLID GLAZING

wide range of glazing: structured polycarbonate plates, solid acrylic/polycarbonate domes or solid glazing

GAS SPRINGS

gas springs for easy leaf raising, hatch ST type equipped with an integrated blockage of the leaf

BLOCKADE OF THE LEAF

blockade of the leaf in fully open position

LADDER UP GRIP


folding, possible to use in hatches LD type and in some sizes of ST type

PIR 60 mm INSULATION

thermal insulation used in the base achieves $U=0,36 \text{ W/m}^2\text{K}$

HANDLE WITH KEY

locking from inside and outside (2 keys in standard)

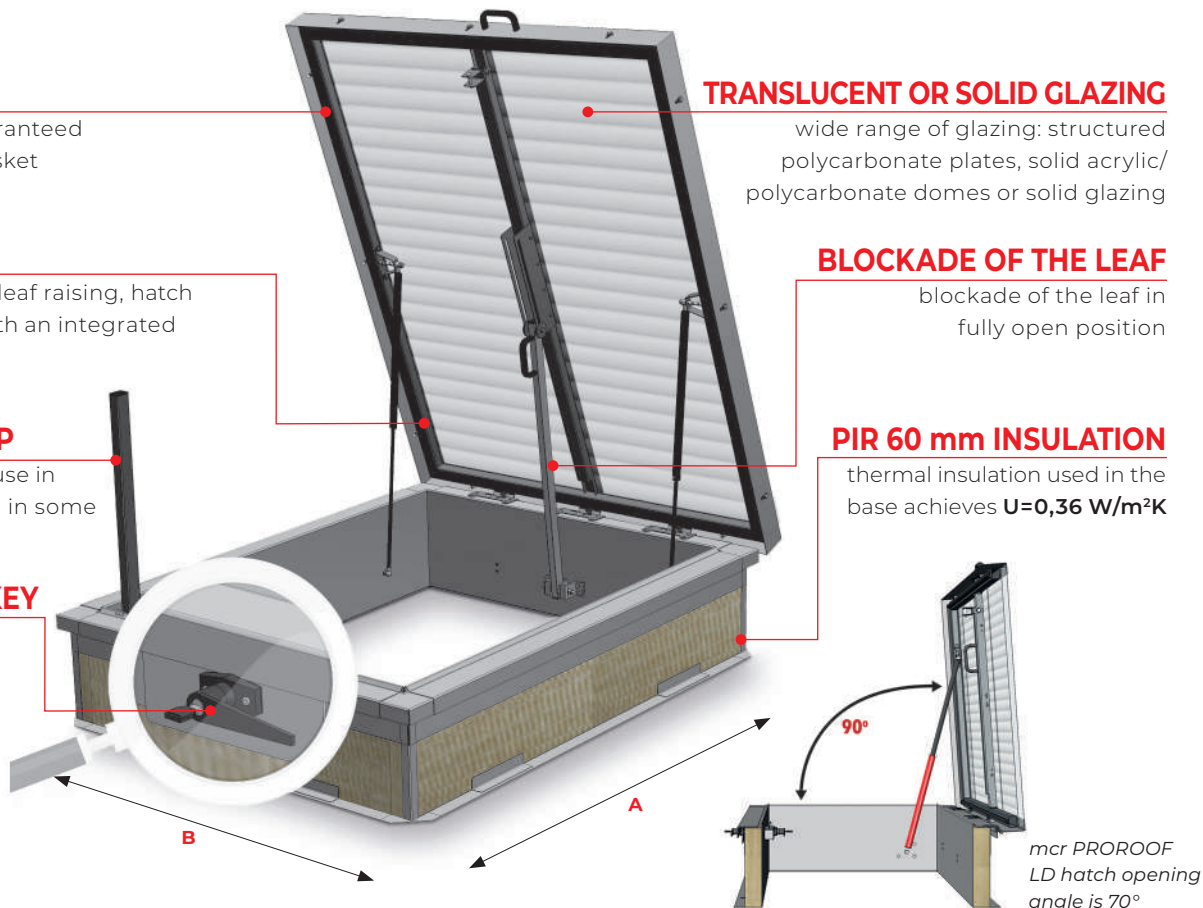

MAIN FEATURES

- » hatch resistance to large soft
- » body impact test
- » device designed for:
 - upward load **UL=1500 Pa**
 - downward load **DL=1000 Pa**
- » durable base made of aluminum sheet
- » leaf made of high-strength steel profiles

ADDITIONAL FEATURES

- » device elements painted to any RAL color
- » adaptor type of base
- » PVC planking
- » protection net 1200 J

MAIN FEATURES

mcr PROROOF ST

width A [mm]	width B [mm]
750	1500
750	2500
750	3300



Read more about our roof access hatch mcr PROROOF



mcr PROROOF LD

width A [mm]	width B [mm]
600	600 700 800 900 1000 1100 1200 1300 1400
700	600 700 800 900 1000 1100 1200 1300 1400
800	600 700 800 900 1000 1100 1200 1300 1400
900	600 700 800 900 1000 1100 1200 1300 1400
1000	600 700 800 900 1000 1100 1200 1300 1400
1100	600 700 800 900 1000 1100 1200 1300 1400
1200	600 700 800 900 1000 1100 1200 1300 1400
1300	600 700 800 900 1000 1100 1200 1300 1400
1400	600 700 800 900 1000 1100 1200 1300 1400
1500	600 700 800 900 1000 1100 1200 1300 1400

www.mercor.com.pl/en



HEADQUARTERS GDAŃSK

ul. Grzegorza z Sanoka 2
80-408 Gdańsk, Poland

tel. + 48 58 341 42 45
export@mercors.com.pl